


SUPER RACING series

< Target engine optimized oil >

HKS engine oils are developed with an idea that oil is a tuning part to maximize performance of engines. The unique viscosity categorization will effect at molecular level on boundary lubrication. Optimized special viscosity selection solves hydrodynamic lubrication. Air tightness and friction performance

Engine building specialist HKS now offer 100% synthetic special blend oil.

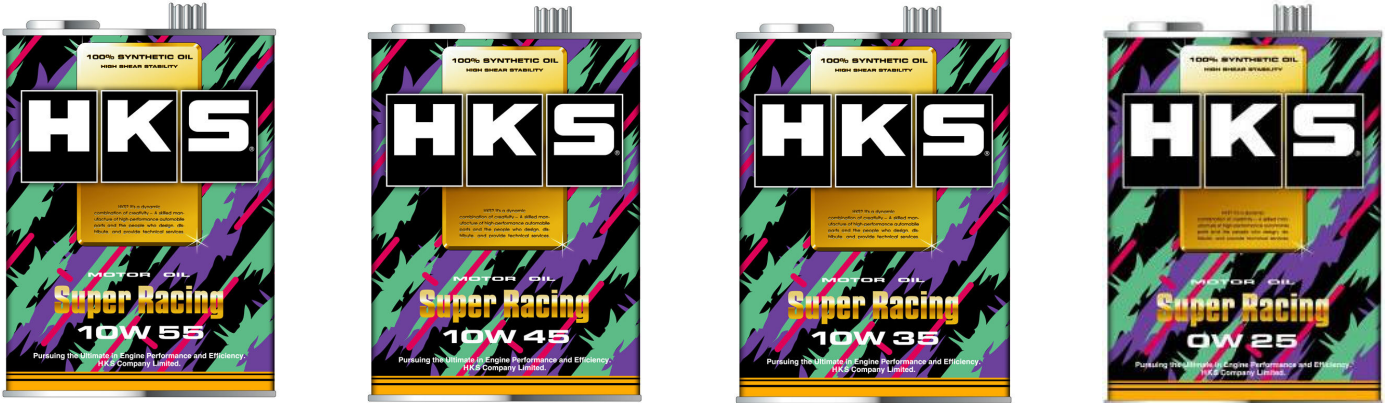

[Features]

- 10W55 ⇒ It is recommended for tuned engines which operation oil temperature is more than 100°C constantly or old vehicles. Max. Oil Temp. 150°C
- 10W45 ⇒ It is recommended for stock or light tuning vehicles. Max. Oil Temp. 140°C
- 10W35 ⇒ For vehicles, which specified oil viscosity is W30. Max. Oil Temp. 130°C
- 0W25 ⇒ For latest echo cars and compact cars, which specified oil viscosity is W20. Max. Oil Temp. 120°C

Product	Base Oil	SAE	Volume	Code No.	Price
SUPER RACING	100% SYNTHETIC	10W55 equivalent	20 Liters	52001-AK088	
			4 Liters	52001-AK073	
			1 Liter	52001-AK074	
		10W45 equivalent	20 Liters	52001-AK089	
			4 Liters	52001-AK075	
			1 Liter	52001-AK076	
		10W35 equivalent	20 Liters	52001-AK090	
			4 Liters	52001-AK077	
			1 Liter	52001-AK078	
		0W25 equivalent	20 Liters	52001-AK093	
			4 Liters	52001-AK092	
			1 Liter	52001-AK091	

SUPER RACING series

< Target engine optimized oil >

HKS engine oils are developed with an idea that oil is a tuning part to maximize performance of engines. The unique viscosity categorization will effect at molecular level on boundary lubrication. Optimized special viscosity selection solves hydrodynamic lubrication. Air tightness and friction performance are highly balanced. Engine building specialist HKS now offer 100% synthetic special blend oil.

SUPER RACING 10W 55 (The successor of Turbo Racing 5W-50, 15W-50)



Applicable for stock specified #w50 grade. Max. Oil Temp. 150°C 100% SYNTHETIC SM-CF equivalent

It is recommended for tuned engines which operation oil temperature is more than 100°C constantly or old vehicles.

Product	Base Oil	SAE	Volume	Code No.	Price	Remarks
SUPER RACING	100% SYNTHETIC	Equivalent to 10W55	20 Liters	52001-AK088		
			4 Liters	52001-AK073		6 cans /case
			1 Liter	52001-AK074		6 cans /case

SUPER RACING series

< Target engine optimized oil >

HKS engine oils are developed with an idea that oil is a tuning part to maximize performance of engines. The unique viscosity categorization will effect at molecular level on boundary lubrication. Optimized special viscosity selection solves hydrodynamic lubrication. Air tightness and friction performance are highly balanced.
Engine building specialist HKS now offer 100% synthetic special blend oil.

SUPER RACING 10W 45 (The successor of Multi Racing 10W-40)



Applicable for stock specified #w50 grade. Max. Oil Temp. 140°C 100% SYNTHETIC SM-CF equivalent

It is recommended for stock or light tuning vehicles.

Product	Base Oil	SAE	Volume	Code No.	Price	Remarks
SUPER RACING	100% SYNTHETIC	Equivalent to 10W45	20 Liters	52001-AK089		
			4 Liters	52001-AK075		6 cans /case
			1 Liter	52001-AK076		6 cans /case

SUPER RACING series

< Target engine optimized oil >

HKS engine oils are developed with an idea that oil is a tuning part to maximize performance of engines. The unique viscosity categorization will effect at molecular level on boundary lubrication. Optimized special viscosity selection solves hydrodynamic lubrication. Air tightness and friction performance are highly balanced.
Engine building specialist HKS now offer 100% synthetic special blend oil.

SUPER RACING 10W 35 (The successor of SS Racing 10W-30)



Applicable for stock specified #w30 grade. Max. Oil Temp. 130°C 100% SYNTHETIC SM equivalent

For vehicles, which specified oil is W30.

Product	Base Oil	SAE	Volume	Code No.	Price	Remarks
SUPER RACING	100% SYNTHETIC	Equivalent to 10W35	20 Liters	52001-AK090		
			4 Liters	52001-AK077		6 cans /case
			1 Liter	52001-AK078		6 cans /case

SUPER RACING series

< Target engine optimized oil >

HKS engine oils are developed with an idea that oil is a tuning part to maximize performance of engines.

The unique viscosity categorization will effect at molecular level on boundary lubrication.

Optimized special viscosity selection solves hydrodynamic lubrication. Air tightness and friction performance are highly balanced.

Engine building specialist HKS now offer 100% synthetic special blend oil.

SUPER RACING 0W 25 (The successor of SS Racing 10W-30)



Applicable for stock specified #w20 grade. Max. Oil Temp. 120°C 100% SYNTHETIC SM equivalent

For latest echo cars and compact cars, which specified oil viscosity is W20.

Product	Base Oil	SAE	Volume	Code No.	Price	Remarks
SUPER RACING	100% SYNTHETIC	Equivalent to 0W25	20 Liters	52001-AK093		
			4 Liters	52001-AK092		6 cans /case
			1 Liter	52001-AK091		6 cans /case